
# Euro XPK Puck Type Programmable Sensor



- Puck and magnet design
- Hall Effect non-contacting technology
- Long life extremely robust
- Programmable angles from 20° up to 360°
- IP68 protection
- Redundant output






### Specifications

| Mechanical            |   |
|-----------------------|---|
| Typical Life Cycle    | In excess of 100 million cycles   |
| Measuring range       | 360° redundant, signal 1 cw, signal 2 ccw   |
| Housing               | High grade temperature resistant plastic  |
| Environmental         |   |
| Operating temperature | -40°C to +125°C (Short term 150°C)  |
| Vibration             | 52000 Hz; Amax = 0.75 mm;<br>amax = 20g to IEC 60068-2-6  |
| IP rating             | IP68 (minimum)  |
| Electrical            |   |
| Supply Voltage        | 5V +/- 0.5V   |
| Output signal         | Ratiometric 5%95% of supply (+/-25mv of specified electrical output range for both start & end voltage) |
| Independant linearity | +/- 0.5% of each signal range   |
| Isolation resistance  | 200 MΩ (500 VDC, 1 bar, 2s)   |
| Electrical connection | See ordering code/wiring diagram  |
| Cable type            | Raychem Spec 55, 24 AWG; Sleeving - Raychem DR25  |

#### Ordering information

(Please use the characters in the chart below to construct your product code)

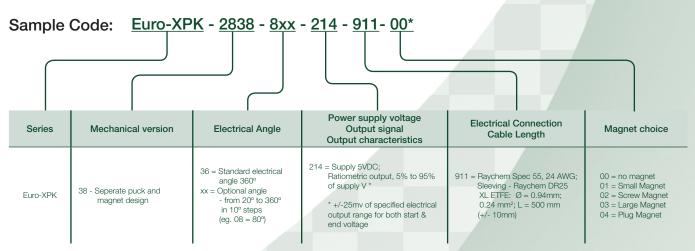

Note\* - Magnet options 01, 02, 03 or 04 are selected in the ordering code and a single magnet is included.

Additional or alternative magnets can be ordered separately as spare parts using the following codes:

93816 - XPK Small Magnet-01

93817 - XPK M10 Magnet-02

93818 - XPK Large Magnet-03

94031 - XPK Plug Magnet-04

Un-housed magnets do not have polarity marked but can be marked if requested Custom magnet housings are available






# Euro XPK Puck Type Programmable Sensor




# **EUROSENSOR**

## Euro XPK - dimensions in mm

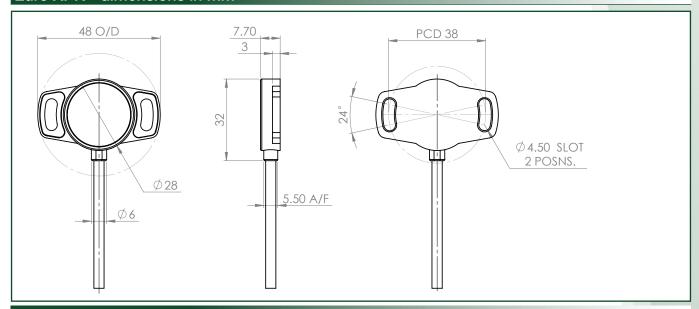

## Magnet options - dimensions in mm

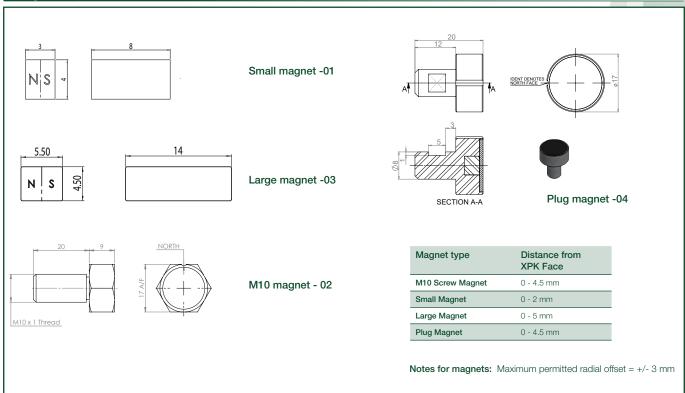

## Wiring and orientation

